



MAF Series (50~150W) 宽电压隔离系列

特性 Features

- 宽电压输入范围 Wide range of input voltage
- 输入宽频噪声滤波 Broadband noise filter of input
- 输入浪涌电流抑制电路 Surge suppress circuit of input
- 输出短路保护 Output short circuit protection
- 快速动态响应 Fast dynamic response
- 外观设计美观 Attractive outline design
- 接线端子出线方式 Terminae connection method
- 符合UL1950、IEC950安全规程 Comply with UL1950,IEC950 safety regulation



输入特性 Input Characteristic

电压范围 (Voltage Range)	220VAC (额定值)	176~264VAC
-------------------------	--------------	------------

输出特性 Output Characteristic

电压精度 (Voltage Set-point Accuracy)	Vo1: ± 1%	交叉调整率 (Cross regulation)	± 3%
电压调整率 (主路) (Line Regulation<main>)	± 0.2%	电流限制点 (Output Current Limiting)	120%(Typ)
负载调整率(主路) (Load Regulation<main>)	± 0.4%	响应速度 (Dynamic Response)	400 μ s
温度系数 (Temperature Coefficient)	± 0.01%/°C		

一般特性 General Characteristic

工作频率 (Switching Frequency)	160~200 KHz	环境特性(Environmental Characteristics)	
绝缘电阻(Isolation Resitstance)	200 MΩ	工作壳温 (Case Temperature)	
MTBF	>500000 H	工业品(Industry)	-25°C ~ +85°C
绝缘强度(Isolation Voltage)		军品I(Military I)	-40°C ~ +85°C
输入-输出(Input-Output)	>1500VAC/1min(漏电流 <5mA)	军品II(Military II)	-55°C ~ +85°C
输入-外壳(Input-Case)	>1500VAC/1min(漏电流 <5mA)	存储温度(Storage Temperature)	
输出-外壳(Output-Case)	>500VDC/1min	工业品(Industry)	-45°C ~ +105°C
主路-副路(Main-Vice)	>500VDC/1min	军品I(Military I)	-55°C ~ +105°C

型号 Models

型号 Models		输入电压(Vac) Input voltage	输入电压范围(Vac) Input voltage range	输出电压(Vdc) Output voltage	输出电流(A) Output current	纹波(mv) Ripple and noise	效率(Typ) Efficiency
单 路	MAF100-220S5	220	176~264	5	20	50	81%
	MAF125-220S12			12	10.4	120	83%
	MAF125-220S15			15	8.33	150	83%
	MAF150-220S24			24	6.25	200	85%
	MAF150-220S28			28	5.36	200	85%

AC-DC 端子式电源模块系列



型号 Models		输入电压(Vac) Input voltage	输入电压范围(Vac) Input voltage range	输出电压(Vdc) Output voltage	输出电流(A) Output current	纹波(mv) Ripple and noise	效率(Typ) Efficiency
双 路	MAF50-220D5&12	220	176~264	5/12	4/2.5	50/120	82%
	MAF75-220D5&15			5/15	5/3.3	50/150	84%
	MAF150-220D12&24			12/24	6/3.25	120/200	86%
三 路	MAF50-220T12&5			± 12/5	± 1.5/3	120/200/80	81%
	MAF100-220T15&12			± 15/12	± 1.73/4	150/180/120	84%
	MAF150-220T12&15			± 12/15	± 4/3.6	120/200/150	86%

说明：仅列出典型型号，其他型号，请确定功率、输入电压及输出电压，致电我公司0571-88915820

Only typical models listed. If you need other model, please conform the power, input voltage and output voltage, then phone us.

外形尺寸及引脚定义(单位mm) Mechanical drawing and pin definition

MAF (50~150W)尺寸：139×88×26mm

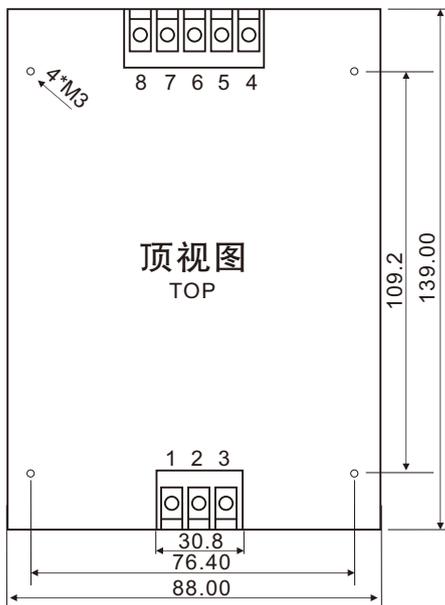

引脚	单路	双路	三路
1	Gr.	Gr.	Gr.
2	Acin	Acin	Acin
3	Acin	Acin	Acin
4	+Vo	+Vo1	+Vo1
5	+Vo	-Vo1	-Vo1
6	-Vo	+Vo2	+Vo2
7	-Vo	-Vo2	GND
8	NC	NC	-Vo3