


MSF150-S SPECIFICATIONS



MODEL		MSF150-3R3	MSF150-5	MSF150-12	MSF150-15
INPUT	VOLTAGE, FREQUENCY	AC100-120V / 200~240V (AC90~132V / 180~264V or DC255~370V), 50/60Hz (44~440Hz or DC)			
	CURRENT	100V~3.2A, 200V~1.7A			
	EFFICIENCY (AC220V)	75% typ	75% typ	75% typ	75% typ
	INRUSH CURRENT	15A typ(ACIN 110V, I ₀ =100%), 30A typ(ACIN 220V, I ₀ =100%) at cold start.			
OUTPUT	VOLTAGE [V]	3.3	5	12	15
	CURRENT [A]	30	29	12	10
	REGULATION, LINE [mV]	25 Max	25 Max	60 Max	75 Max
	REGULATION, LOAD [mV]	50 Max	50 Max	120 Max	150 Max
	RIPPLE [mVp-p]	50 Max	50 Max	120 Max	150 Max
	RIPPLE, NOISE [mVp-p]	100 Max	100 Max	170 Max	200 Max
	TEMPERATURE DRIFT 0~+50°C [mV]	50 Max	75 Max	180 Max	225 Max
	RISE TIME [ms]	800 max (ACIN 110V, I ₀ =100%)			
	HOLDING TIME [ms]	15 typ (ACIN 110V, I ₀ =100%)			
PROTECTION CIRCUIT	OVER CURRENT PROTECTION	Works at over 110% of rating and recovers automatically			
	OVER VOLTAGE PROTECTION	Works at 115~140% of rating (In the case of 3.3V, it is 115~160%)			
ELECTRICALLY ISOLATED	INPUT-OUTPUT	AC3,000V 1 minute current 20mA, DC 500V 100MΩ (At room temperature & Humidity)			
	INPUT-CASE, FG	AC2,000V 1 minute current 20mA, DC 500V 100MΩ (At room temperature & Humidity)			
	OUTPUT-CASE, FG	AC500V 1 minute current 100mA, DC 500V 100MΩ (At room temperature & Humidity)			
ENVIRONMENT	OPERATING TEMP AND HUMID	-10~+50°C, 20~90% RH(Non condensing)			
	STORAGE TEMP AND HUMID	-20~+75°C, 20~90% RH(Non condensing)			
	VIBRATION	10~55Hz at 1G, 3 minutes period, 30 minutes along X, Y and Z axis			
	IMPACT	10G for 20ms once on each X, Y and Z axis			
SAFETY	SAFETY REGULATION	UL, C-UL, CE	UL, C-UL, CE	UL, C-UL, CE	UL, C-UL, CE
	LINE CONDUCTED RF VOLTAGE	Complied with FCC Part15 and EN55022 Class A Limits			

MSF150-S EXTERNAL VIEW

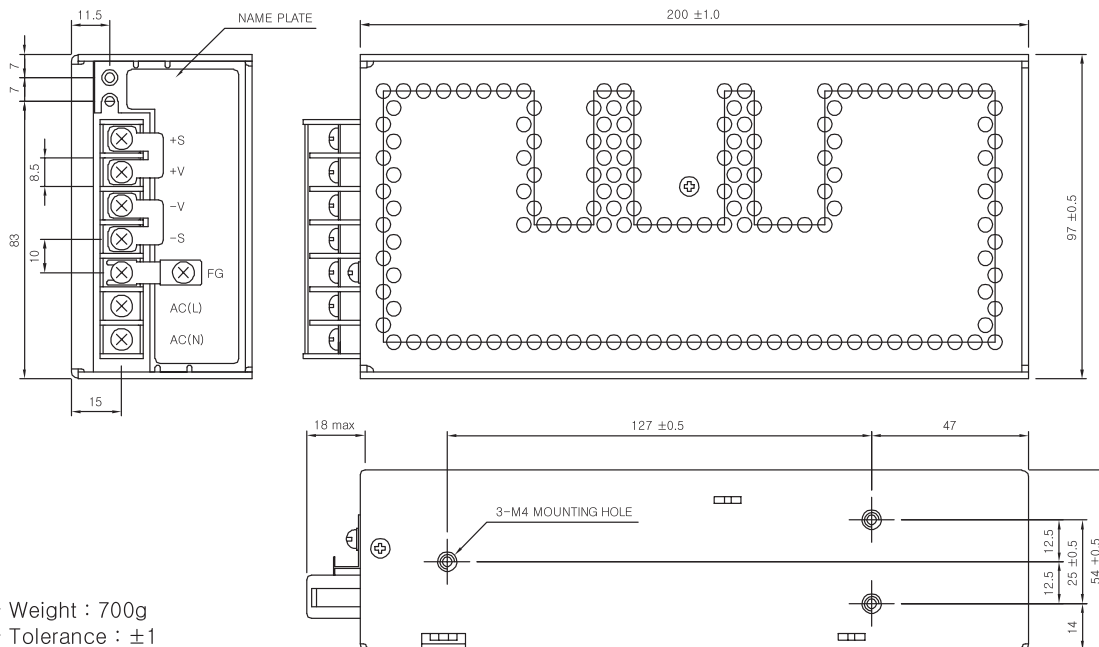


- * Weight : 700g
- * Tolerance : ±1
- * Dimensions in mm

MSF150-S SPECIFICATIONS



	MODEL	MSF150-24	MSF150-28	MSF150-36	MSF150-48
INPUT	VOLTAGE, FREQUENCY	AC100-120V / 200~240V (AC90~132V / 180~264V or DC255~370V), 50/60Hz (44~440Hz or DC)			
	CURRENT	100V~3.2A, 200V~1.7A			
	EFFICIENCY (AC220V)	75% typ	75% typ	75% typ	75% typ
	INRUSH CURRENT	15A typ (ACIN 110V, I _c =100%), 30A typ (ACIN 220V, I _c =100%) at cold start.			
OUTPUT	VOLTAGE [V]	24	28	36	48
	CURRENT [A]	6	5.5	4.1	3.2
	REGULATION, LINE [mV]	120 Max	140 Max	180 Max	240 Max
	REGULATION, LOAD [mV]	240 Max	280 Max	360 Max	480 Max
	RIPPLE [mVp-p]	240 Max	280 Max	360 Max	480 Max
	RIPPLE, NOISE [mVp-p]	290 Max	330 Max	410 Max	530 Max
	TEMPERATURE DRIFT 0~+50°C [mV]	360 Max	420 Max	540 Max	720 Max
	RISE TIME [ms]	800 max (ACIN 110V, I _c =100%)			
	HOLDING TIME [ms]	15 typ (ACIN 110V, I _c =100%)			
	PROTECTION CIRCUIT	OVER CURRENT PROTECTION	Works at over 110% of rating and recovers automatically		
OVER VOLTAGE PROTECTION		Works at 115~140% of rating			
ELECTRICALLY ISOLATED	INPUT-OUTPUT	AC3,000V 1 minute current 20mA, DC 500V 100MΩ (At room temperature & Humidity)			
	INPUT-CASE, FG	AC2,000V 1 minute current 20mA, DC 500V 100MΩ (At room temperature & Humidity)			
	OUTPUT-CASE, FG	AC500V 1 minute current 100mA, DC 500V 100MΩ (At room temperature & Humidity)			
ENVIRONMENT	OPERATING TEMP AND HUMID	-10~+50°C, 20~90% RH(Non condensing)			
	STORAGE TEMP AND HUMID	-20~+75°C, 20~90% RH(Non condensing)			
	VIBRATION	10~55Hz at 1G, 3 minutes period, 30 minutes along X, Y and Z axis			
	IMPACT	10G for 20ms once on each X, Y and Z axis			
SAFETY	SAFETY REGULATION	UL, C-UL, CE	UL, C-UL, CE	UL, C-UL, CE	UL, C-UL, CE
	LINE CONDUCTED RF VOLTAGE	Complied with FCC Part15 and EN55022 Class A Limits			

MSF150-S EXTERNAL VIEW

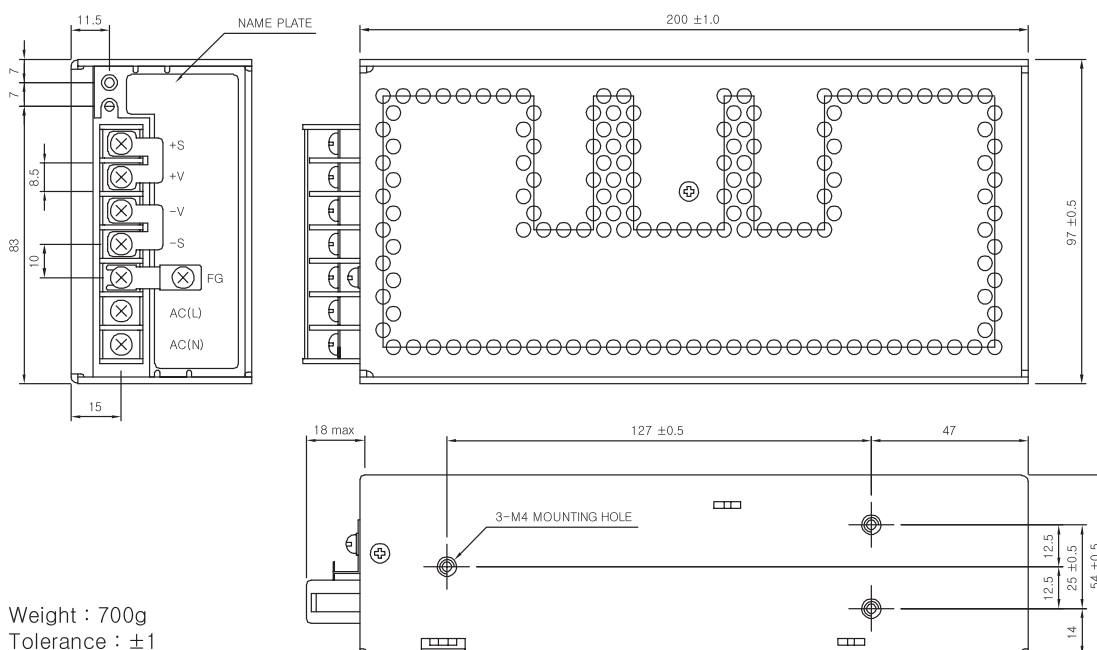

- * Weight : 700g
- * Tolerance : ±1
- * Dimensions in mm